



# LED POWER SUPPLIES 12VDC

Dual Voltage Input Range  
90...140 / 170...250VAC  
50/60Hz



Indoor application !

Short Circuit and  
Thermal Overload  
Protected

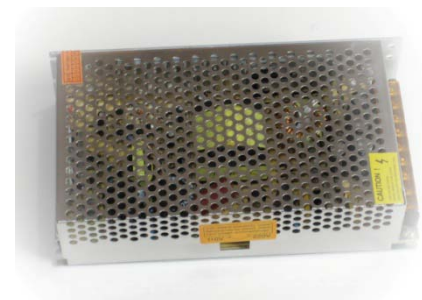

Constant Voltage Output

Available Sizes:

12V 48W 4.0A  
12V 50W 4.16A  
12V 60W 5.0A  
12V 100W 8.5A  
12V 150W 12.5A  
12V 200W 16.5A  
12V 250W 21.0A  
12V 320W 27.0A  
12V 360W 30.0A



## Used for all 12V LED-Strip lighting

**With Power Factor Correction Function  $Pf \geq 0.99$**

**SUPPORT GREEN ENERGY !**  
RoHS compliant  
contains no Mercury  
CE Certified

[www.epacs-mfs.com](http://www.epacs-mfs.com)  
[technical@epacs-mfs.com](mailto:technical@epacs-mfs.com)

# EPACS

MOHAMMED F. AL-SHAHRI EST.

Your guiding  
LEDlight  
Supplier

